




Totally Lead free Chip Resistors
(RM series standard)
Halogen-Free

Document No.	TRM-XX0S020B
Revise Date	2024 / 08 / 09
Page number	1/13

1. Scope :

This specification applies for the RM series of totally lead free chip resistors made by TA-I.

2. Construction :

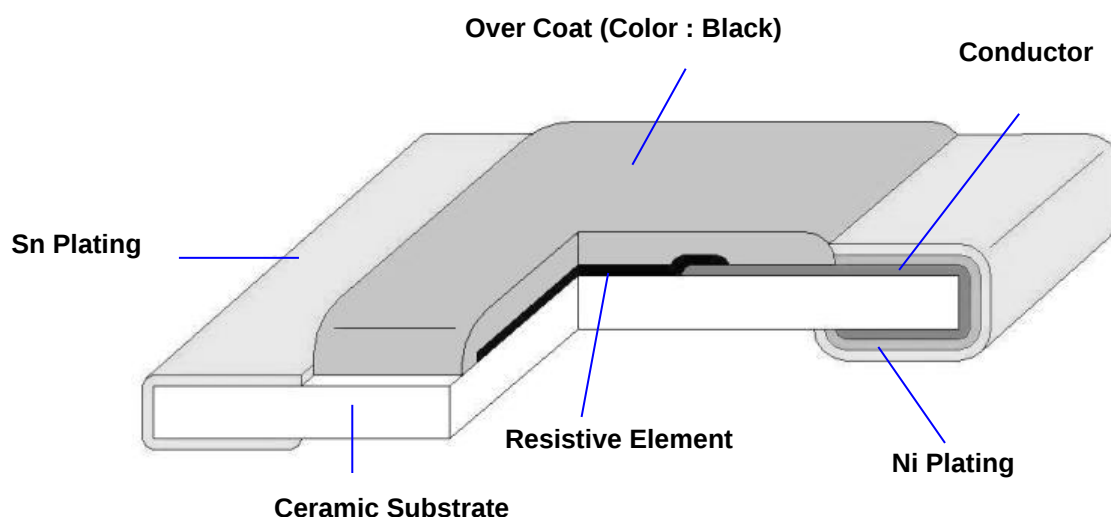

3. Type Designation :


<u>RM</u>	<u>10</u>	<u>J</u>	<u>TW</u>	<u>103</u>
Product Code	Size	Tolerance	Packaging	Nominal Resistance
RM : Chip Resistor	Power Rating			
01-01005(0402)	1/32W	J-±5%	L : 02&04 - 50K / 13" Reel	3 digits, e.g.,:
02-0201(0603)	1/20W	G-±2%	H : 06&10&12 - 20K /13"	(E-24) 103 = 10kΩ
04-0402(1005)	1/16W	F-±1%	Reel	0 = 0Ω
06-0603(1608)	1/10W	D-±0.5%	T : Paper Tape / 7" Reel	4 digits, e.g., :
10-0805(2012)	1/8W	B-±0.1%	E : Embossed Tape	(E-96) 1540 = 154Ω
12-1206(3216)	1/4W			43R2 = 43.2Ω
13-1210(3226)	1/2W		W : Totally Lead free	
20-2010(5025)	3/4W			
25-2512(6432)	1 W			



Totally Lead free Chip Resistors
(RM series standard)
Halogen-Free

Document No.	TRM-XX0S020B
Revise Date	2024 / 08 / 09
Page number	2/13

4. Dimensions :

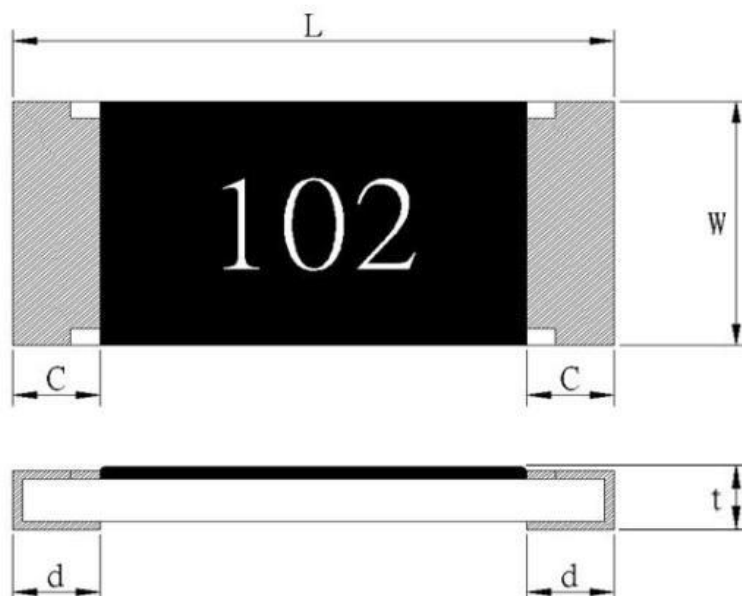

UNIT: mm

Type	L	W	C	d	t
RM01	0.40±0.02	0.20±0.02	0.10±0.03	0.10±0.03	0.13±0.02
RM02	0.60±0.03	0.30±0.03	0.1±0.05	0.15±0.05	0.23±0.03
RM04	$1.00^{+0.1}_{-0.05}$	0.50±0.05	0.20±0.10	0.25±0.10	0.32±0.05
RM06	1.60±0.10	0.80±0.10	0.30±0.20	$0.30^{+0.2}_{-0.1}$	0.45±0.10
RM10	2.00±0.10	1.25±0.10	0.40±0.20	0.40±0.20	0.50±0.10
RM12	3.10±0.10	1.55±0.10	0.50±0.30	0.40±0.20	0.55±0.10
RM13	3.10±0.10	2.55±0.10	0.50±0.30	0.40±0.20	0.60±0.10
RM20	5.00±0.15	2.50±0.15	0.60±0.30	0.50±0.25	0.60±0.10
RM25	6.30±0.20	3.20±0.20	0.60±0.30	0.50±0.25	0.60±0.10



Totally Lead free Chip Resistors
(RM series standard)
Halogen-Free

Document No.	TRM-XX0S020B
Revise Date	2024 / 08 / 09
Page number	3/13

5. Ratings & Characteristics :

Type	Power Rating at 70°C	Rating Voltage	Max. Working Voltage	Max. Over-Load Voltage	T.C.R (PPM/°C)	Resistance Range(Ω)				
						B(±0.1%) E-96&E-24	D(±0.5%) E-96&E-24	F(±1%) E-96&E-24	G(±2%) E-24	J(±5%) E-24
RM01	1/32W	Refer 5.2	15V	30V	±300			10Ω≤R<100Ω	10Ω≤R<100Ω	10Ω≤R<100Ω
					±200			100Ω≤R≤1MΩ	100Ω≤R≤1MΩ	100Ω≤R≤1MΩ
					+600 -200			1Ω≤R<10Ω		1Ω≤R<10Ω
RM02	1/20W	Refer 5.2	25V	50V	±200		100Ω-10KΩ	10Ω-3MΩ	10Ω-3MΩ	10Ω-10MΩ
					+600 -200			1Ω≤R<10Ω	1Ω≤R<10Ω	1Ω≤R<10Ω
RM04*	1/16W	Refer 5.2	50V	100V	±100	100Ω~499KΩ	100Ω~1MΩ	100Ω~1MΩ		
					±200	10Ω≤R<100Ω	10Ω≤R<100Ω	10Ω≤R<100Ω 1MΩ<R≤10MΩ	10Ω-10MΩ	10Ω-10MΩ
					+500 -200			1Ω≤R<10Ω	1Ω≤R<10Ω	1Ω≤R<10Ω
					±400				10MΩ≤R≤20MΩ	10MΩ≤R≤20MΩ
RM06*	1/10W	Refer 5.2	75V	150V	±100	14Ω-560kΩ	10Ω-1MΩ	10Ω-1MΩ		
					±200			1M<R≤10MΩ	10Ω-10MΩ	10Ω-10MΩ
					±400			1Ω≤R<10Ω	1Ω≤R<10Ω	1Ω≤R<10Ω 10MΩ<R≤20MΩ
RM10*	1/8W	Refer 5.2	150V	300V	±100	24Ω-560kΩ	10Ω-1MΩ	10Ω-1MΩ		
					±200			1M<R≤10MΩ	10Ω-10MΩ	10Ω-10MΩ
					±400			1Ω≤R<10Ω	1Ω≤R<10Ω	1Ω≤R<10Ω 10MΩ<R≤20MΩ
RM12*	1/4W	Refer 5.2	200V	400V	±100	33Ω-560kΩ	10Ω-1MΩ	10Ω-1MΩ		
					±200			1M<R≤10MΩ	10Ω-10MΩ	10Ω-10MΩ
					±400			1Ω≤R<10Ω	1Ω≤R<10Ω	1Ω≤R<10Ω 10MΩ<R≤20MΩ
RM13	1/2W	Refer 5.2	200V	400V	±100	10Ω-560kΩ	10Ω-1MΩ	10Ω-1MΩ		
					±200			1M<R≤10MΩ	10Ω-10MΩ	10Ω-10MΩ
					±400			1Ω≤R<10Ω	1Ω≤R<10Ω	1Ω≤R<10Ω 10MΩ<R≤20MΩ
RM20	3/4W	Refer 5.2	200V	400V	±100	10Ω-560kΩ	10Ω-1MΩ	10Ω-1MΩ		
					±200			1M<R≤10MΩ	10Ω-10MΩ	10Ω-10MΩ
					±400			1Ω≤R<10Ω	1Ω≤R<10Ω	1Ω≤R<10Ω 10MΩ<R≤20MΩ
RM25	1W	Refer 5.2	200V	400V	±100	10Ω-560kΩ	10Ω-1MΩ	10Ω-1MΩ		
					±200			1M<R≤10MΩ	10Ω-10MΩ	10Ω-10MΩ
					±400			1Ω≤R<10Ω	1Ω≤R<10Ω	1Ω≤R<10Ω 10MΩ<R≤20MΩ

Note1* : For sizes 04 to 12, some of the resistance values use alloy film, and the resistance range is as follows:

RM04(1Ω~7Ω), RM06(1Ω~14Ω), RM10 (1Ω~24Ω), RM12(1Ω~33Ω)

Note2 : Except for the above standardized products, we also provide the customized products.



Totally Lead free Chip Resistors
(RM series standard)
Halogen-Free

Document No.	TRM-XX0S020B
Revise Date	2024 / 08 / 09
Page number	4/13

Ω TOTALLY LEAD FREE CHIP RESISTORS

Type	Rated Current	Max Overload Current	Resistance Range
RM01	0.5A	1A	50mΩ MAX
RM02	0.5A	1A	50mΩ MAX
RM04	1A	2.5A	50mΩ MAX
RM06	1A	2.5A	50mΩ MAX
RM10	2A	5A	50mΩ MAX
RM12	2A	5A	50mΩ MAX
RM13	2A	5A	50mΩ MAX
RM20	2A	5A	50mΩ MAX
RM25	2A	5A	50mΩ MAX

Operating Temp (°C) : -55°C ~ +155°C (RM01 / 02 : -55°C ~ +125°C)

Note : Except for the above standardized products, we also provide the customized products.

5.1. Derating Curve :

For resistors operated at ambient temperature over 70°C , power rating shall be derated in accordance with figure 1.

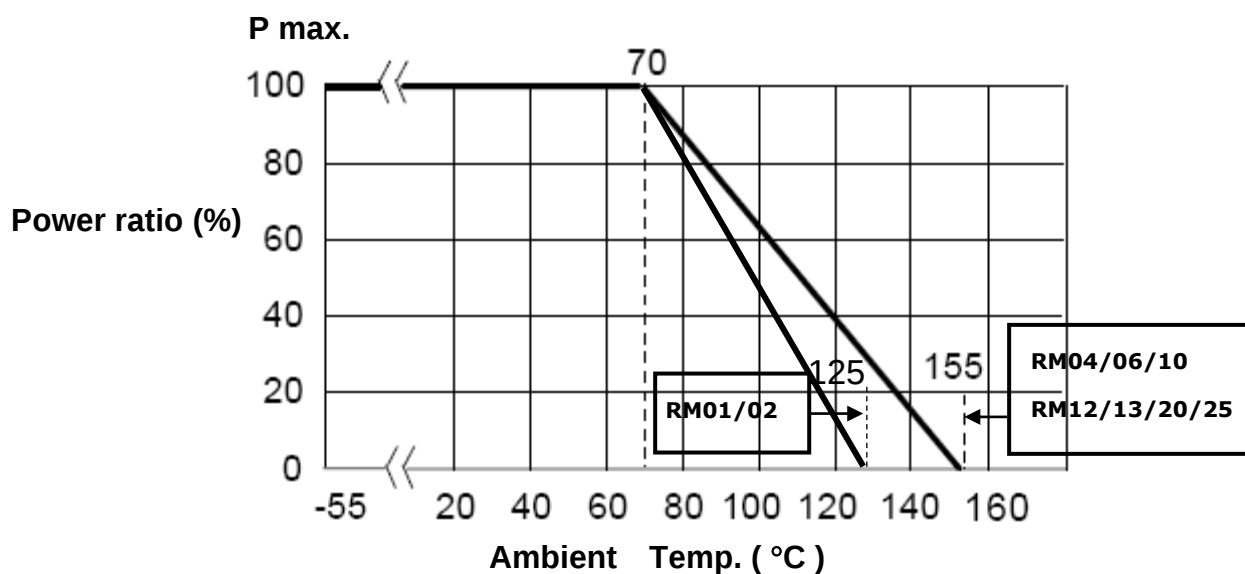


Figure 1



Totally Lead free Chip Resistors
(RM series standard)
Halogen-Free

Document No.	TRM-XX0S020B
Revise Date	2024 / 08 / 09
Page number	5/13

5.2. Rated Voltage :

The rated voltage is calculated by the following formula:

$$E = \sqrt{P * R}$$

E=Rated Voltage(V)
P=Rated Power(W)
R=Resistance Value(Ω)

E.G. : What is RM06JTW102 the rated voltage ?

RM06JTW102 P:1/10W ; R:102 = 1K Ω = 1000 Ω

$$E = \sqrt{0.1(W) * 1000(\Omega)} = 10 (V)$$

6. Reliability Tests :

Test Items	Reference standard	Condition of Test	Test Limits ΔR
Temperature Coefficient of Resistance	IEC60115-1-4.8 JIS-C5201-1-4.8	-55 ~ +125 $^{\circ}\text{C}$	Refer 5.0
Short Time Overload	IEC60115-1-4.13 JIS-C5201-1-4.13	2.5 X rated voltage for 5 sec	$\pm(1.0\% + 0.05\Omega)$ Remarks : 01005& 0201 : $\pm(3.0\% + 0.1\Omega)$ 0402 : $\pm(2.0\% + 0.1\Omega)$ 0 Ω : 50m Ω or less
Intermittent Overload	IEC60115-1-4.39 JIS-C5201-1-4.39	3.0 X rated voltage or Max Overloading voltage ,1sec "ON" , 25sec "OFF" ,10000 cycles (Remarks : 01005 & 0201-NA , 0402 2.5 X RCWV *)	$\pm (5.0\% + 0.1\Omega)$ 0 Ω : 50m Ω or less
Endurance (Load Life)	IEC60115-1-4.25.1 JIS-C5201-1-4.25.1	1000 hours at rated voltage, 70 $^{\circ}\text{C}$, 1.5hours "ON" , 0.5hour "OFF"	0.1%,0.5%,1% : $\pm(1.0\% + 0.05\Omega)$ 2%,5% : $\pm(3.0\% + 0.1\Omega)$ Remarks : 01005& 0201 : $\pm(5.0\% + 0.1\Omega)$ 0402 : $\pm(3.0\% + 0.1\Omega)$ 0 Ω : 100m Ω or less
Load Life with Humidity	IEC60115-1-4.24 JIS-C5201-1-4.24	1000 hours at rated voltage , 40 $\pm$ 2 $^{\circ}\text{C}$, 90~95% RH 1.5hours "ON" , 0.5hour "OFF"	0.1%,0.5%,1% : $\pm(1.0\% + 0.05\Omega)$ 2%, 5% : $\pm(3.0\% + 0.1\Omega)$ Remarks : 01005&0201 : $\pm(5.0\% + 0.1\Omega)$ 0402 : $\pm(3.0\% + 0.1\Omega)$ 0 Ω : 100m Ω or less
Rapid Change of Temperature	IEC60115-1-4.19 JIS-C5201-1-4.19	-55 $^{\circ}\text{C}$ (30 min.) / +155 $^{\circ}\text{C}$ (30 min.) 5 cycles	0.1%,0.5%,1% : $\pm(0.5\% + 0.05\Omega)$ 2%, 5% : $\pm(1.0\% + 0.05\Omega)$ Remarks : 01005& 0201 : $\pm(3.0\% + 0.1\Omega)$ 0 Ω : 50m Ω or less
Solderability	IEC60115-1-4.17 JIS-C5201-1-4.17	245 $\pm$ 5 $^{\circ}\text{C}$ solder, 2 $\pm$ 0.5 sec dwell. Solder : Sn96.5 / Ag3.0 / Cu0.5	At least 95% of surface area of electrode shall be covered with new solder.



Totally Lead free Chip Resistors
(RM series standard)
Halogen-Free

Document No.	TRM-XX0S020B
Revise Date	2024 / 08 / 09
Page number	6/13

Robustness of Termination (Bending)	IEC60115-1-4.33 JIS-C5201-1-4.33	3mm deflection 2mm deflection (RM20,25)	0.1%,0.5%,1% : $\pm(0.5\% + 0.05\Omega)$ 2%,5% : $\pm(1.0\% + 0.05\Omega)$ Remarks : 01005& 0201 : $\pm(1.0\% + 0.05\Omega)$ 0 Ω : 50m Ω or less
Dielectric Withstanding Voltage (Voltage Proof)	IEC60115-1-4.7 JIS-C5201-1-4.7	Applying voltage : 01005 & 0201 : 50V , 0402 & 0603 : 300V The other 500V for a minute.	No abnormalities such as flashover, burning dielectric breakdown shall appear.
Insulation Resistance	IEC60115-1-4.6 JIS-C5201-1-4.6	Applying voltage 100V for 1 minute. Remark : 01005 & 0201 50V	$\geq 1G\Omega$ Remarks : 01005 : $\geq 100M\Omega$
Resistance to Dry Heat	IEC60115-1-4.23.2 JIS-C5201-1-4.23.2	155 $\pm 5^{\circ}\text{C}$ for 96 ± 4 Hrs Remark : 01005 & 0201 125 $\pm 5^{\circ}\text{C}$	0.1%,0.5%,1% : $\pm(1.0\% + 0.05\Omega)$ 2%,5% : $\pm(2.0\% + 0.1\Omega)$ Remark : 01005 : $\pm(3.0\% + 0.1\Omega)$ 0201 : $\pm(2.0\% + 0.1\Omega)$ 0 Ω : 50m Ω or less
Resistance to Solder Heat	IEC60115-1-4.18 JIS-C5201-1-4.18	270 $\pm 5^{\circ}\text{C}$ solder , 10 ± 1 sec dwell .	0.1%,0.5%,1% : $\pm(0.5\% + 0.05\Omega)$ 2%, 5% : $\pm(1.0\% + 0.05\Omega)$ Remarks : 01005 : $\pm(3.0\% + 0.1\Omega)$ 0201 : $\pm(3.0\% + 0.1\Omega)$ 0 Ω : 50m Ω or less

Note* : RCWV : Rated continuous working voltage .

7. Marking

7.1. $\pm 2\%$, $\pm 5\%$ (E24) : RM06 / RM10 / RM12 / RM13 / RM20 / RM25

Resistance value is expressed by 3 digits, the first two digits represent the significant figures of nominal resistance value in Ω , and the third digit represents exponent for base of 10.

E.G. : , 102 = $10 \times 10^2 = 1000\Omega = 1K\Omega$



Notes : RM06 : R represents the 「 • 」

7.2. $\pm 0.1\%$, $\pm 0.5\%$, $\pm 1\%$ (E96) : RM10 / RM12 / RM13 / RM20 / RM25

Resistance value is expressed by 4 digits, the first three digits represent the significant figures of nominal resistance value in Ω , and the fourth digit represents exponent for base of 10.

E.G. : 1000 = $100 \times 100 = 100\Omega$





Totally Lead free Chip Resistors
(RM series standard)
Halogen-Free

Document No.	TRM-XX0S020B
Revise Date	2024 / 08 / 09
Page number	7/13

7.3. $\pm 0.1\%$, $\pm 0.5\%$, $\pm 1\%$ (E96) : RM06

When the marking space is too small in such small-sized resistors as RM06, the marking can not made by 4 digits and may be made by two digits combined with one English capital.

Symbol for E96 series nominal resistance value

Symbol	E96	Symbol	E96	Symbol	E96	Symbol	E96
01	100	25	178	49	316	73	562
02	102	26	182	50	324	74	576
03	105	27	187	51	332	75	590
04	107	28	191	52	340	76	604
05	110	29	196	53	348	77	619
06	113	30	200	54	357	78	634
07	115	31	205	55	365	79	649
08	118	32	210	56	374	80	665
09	121	33	215	57	383	81	681
10	124	34	221	58	392	82	698
11	127	35	226	59	402	83	715
12	130	36	232	60	412	84	732
13	133	37	237	61	422	85	750
14	137	38	243	62	432	86	768
15	140	39	249	63	442	87	787
16	143	40	255	64	453	88	806
17	147	41	261	65	464	89	825
18	150	42	267	66	475	90	845
19	154	43	274	67	487	91	866
20	158	44	280	68	499	92	887
21	162	45	287	69	511	93	909
22	165	46	294	70	523	94	931
23	169	47	301	71	536	95	953
24	174	48	309	72	549	96	976

Symbol for multipliers

Symbol	A	B	C	D	E	F	G	H	X	Y	Z
multipliers	10^0	10^1	10^2	10^3	10^4	10^5	10^6	10^7	10^{-1}	10^{-2}	10^{-3}

E.G : $01A = 100 \times 10^0 = 100 \Omega$



Notes :

When the resistance value is not in the list of E96 , 3 digitals with underline in E-24 series is used as mark .

E.G. : 0603 , 120Ω , 1% Marking is 121





Totally Lead free Chip Resistors (RM series standard) Halogen-Free

Document No.	TRM-XX0S020B
Revise Date	2024 / 08 / 09
Page number	8/13

7.4. $\pm 0.1\%$, $\pm 0.5\%$, $\pm 1\%$ (E96 / 3digitals) :

The resistance value by 3 digits is requirement for customer.

7.5. RM06 / RM10 / RM12 / RM13 / RM20 / RM25 :

E.G. : 0 = 0 Ω




7.6. No Marking for RM01 & RM02 & RM04

8. Taping & Reel :

8.1. Taping Dimensions

8.1.1 4 mm pitch paper :

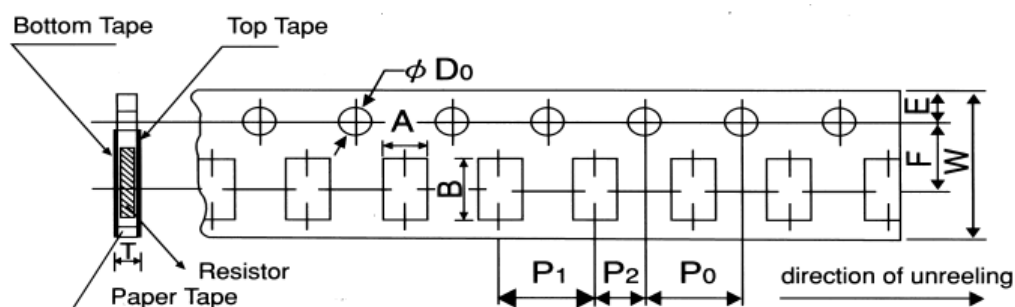


Packing	Type	A	B	W	F	E	P ₁	P ₂	P ₀	D ₀	T
Paper	RM06	1.1 $\pm$ 0.1	1.9 $\pm$ 0.1	8.0 $\pm$ 0.2	3.5 $\pm$ 0.05	1.75 $\pm$ 0.1	4.0 $\pm$ 0.1	2.0 $\pm$ 0.05	4.0 $\pm$ 0.1	ϕ 1.5 +0.1 -0	0.64 $\pm$ 0.1
	RM10	1.6 $\pm$ 0.15	2.4 $\pm$ 0.2								0.84 $\pm$ 0.1
	RM12	2.0 $\pm$ 0.15	3.6 $\pm$ 0.2								
	RM13	2.8 $\pm$ 0.2	3.6 $\pm$ 0.2								



Totally Lead free Chip Resistors (RM series standard) Halogen-Free


Document No.	TRM-XX0S020B
Revise Date	2024 / 08 / 09
Page number	9/13

8.1.2 2 mm pitch paper :

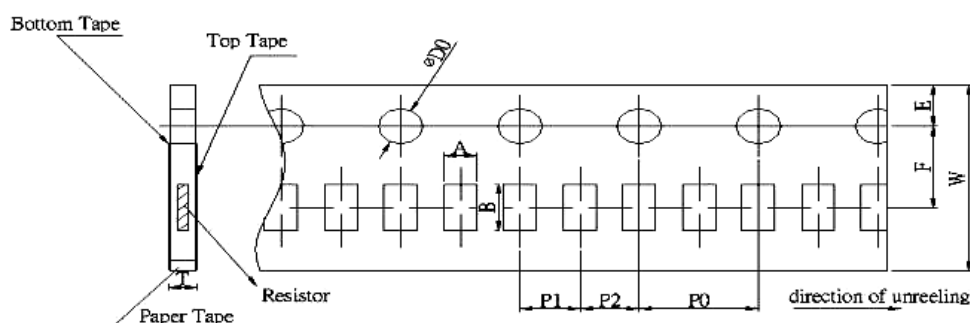

Packing	Type	A	B	W	F	E	P ₁	P ₂	P ₀	D ₀	T
Paper	RM01	0.24±0.05	0.45±0.1	8.0±0.2	3.5±0.05	1.75±0.1	2.0±0.05	2.0±0.05	4.0±0.1	φ 1.5 +0.1 -0	0.40±0.1
	RM02	0.37±0.05	0.67±0.1				2.0±0.05	2.0±0.05			0.37±0.1
	RM04	0.7±0.05	1.2±0.05				2.0±0.1	2.0±0.1			0.45±0.1

8.1.3 4 mm pitch Emboss :

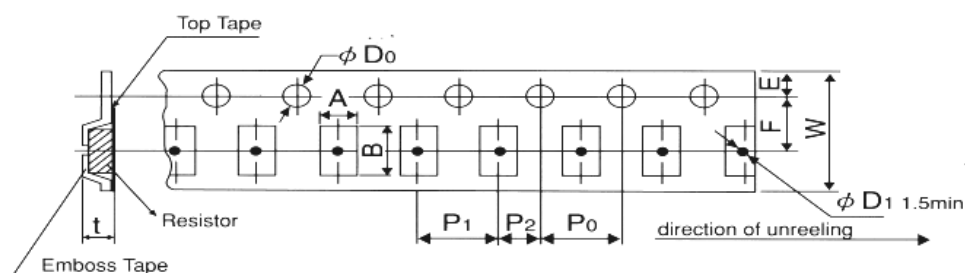

UNIT: mm

Packing	Type	A	B	W	F	E	P ₁	P ₂	P ₀	D ₀	T
Emboss	RM20	2.8±0.2	5.3±0.2	12.0±0.2	5.5±0.05	1.75±0.1	4.0±0.1	2.0±0.05	4.0±0.05	φ 1.5 +0.1 -0	0.85±0.15
	RM25	3.6±0.2	6.9±0.2								



Totally Lead free Chip Resistors
(RM series standard)
Halogen-Free



Document No.	TRM-XX0S020B
Revise Date	2024 / 08 / 09
Page number	10/13

UNIT: pcs

Package Type \ Size		Paper Tape				Emboss Plastic Tape 4 mm pitch
		4 mm pitch		2 mm pitch		
		178mm/R	330mm/R	178mm/R	330mm/R	
RM	01			10000		
RM	02			10000	50000	
RM	04			10000	50000	
RM	06	5000	20000			
RM	10	5000	20000			
RM	12	5000	20000			
RM	13	5000				
RM	20					4000
RM	25					4000

8.2. Reel Specifications :

8.2.1 7" Reel

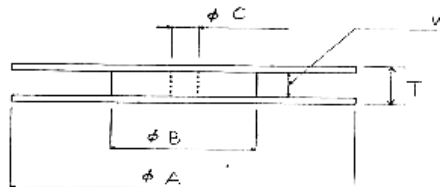

UNIT: mm

Type	ϕA	ϕB	ϕC	W	T
RM01 / 02 / 04 / 06 RM10 / 12 / 13	178.0 ± 2.0	60.0 ± 1.0	13.0 ± 1.0	9.0 ± 1.0	11.5 ± 1.0
RM20 / 25				13.0 ± 1.0	15.5 ± 1.0

8.2.2 13" Reel

Type	ϕA	ϕB	ϕC	W	T
RM02 / 04 / 06 RM10 / 12	330.0 ± 2.0	100.0 ± 1.0	13.5 ± 1.0	9.0 ± 1.0	14.0 ± 1.0




Totally Lead free Chip Resistors
(RM series standard)
Halogen-Free


Document No.	TRM-XX0S020B
Revise Date	2024 / 08 / 09
Page number	11/13

8.3. Peel –off force :

Peel –off force of paper and blister tape is in accordance with “JIS-C5202 ”
that is , 0.1 to 0.7 N at a peel-off speed of 300 mm / minute.

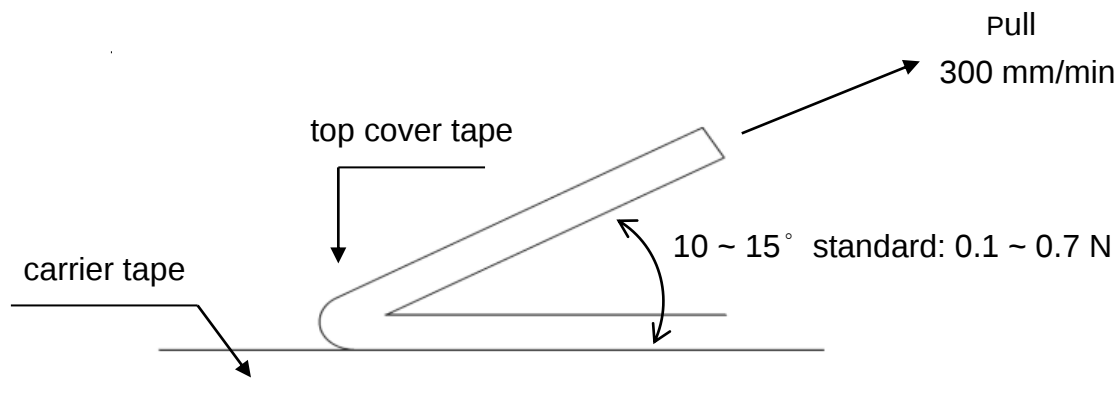

9. Recommended land patterns :

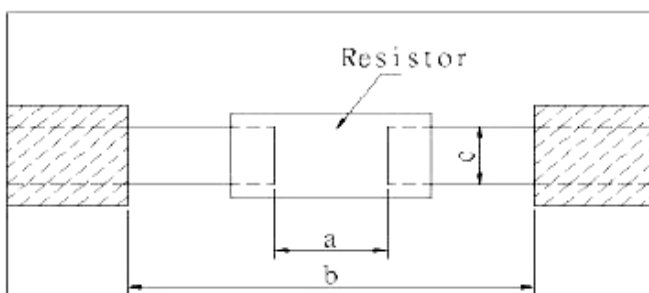


Type	Size	Land pattern	Dimension (mm)		
			a	b	c
RM	01 (01005)		0.15~0.20	0.5~0.7	0.20~0.25
RM	02 (0201)		0.25~0.3	0.7~0.9	0.3~0.4
RM	04 (0402)		0.50~0.6	1.4~1.6	0.4~0.6
RM	06 (0603)		0.7~0.9	2.0~2.2	0.8~1.0
RM	10 (0805)		1.0~1.4	3.2~3.8	0.9~1.4
RM	12 (1206)		2.0~2.4	4.4~5.0	1.2~1.8
RM	13 (1210)		2.0~2.4	4.4~5.0	2.3~3.5
RM	20 (2010)		3.3~3.7	5.7~6.5	2.3~3.5
RM	25 (2512)		3.6~4.0	7.6~8.6	2.3~3.5



Totally Lead free Chip Resistors
(RM series standard)
Halogen-Free

Document No.	TRM-XX0S020B
Revise Date	2024 / 08 / 09
Page number	12/13

10. Recommend IR – Reflow profile : (solder : Sn96.5 / Ag3 / Cu0.5)

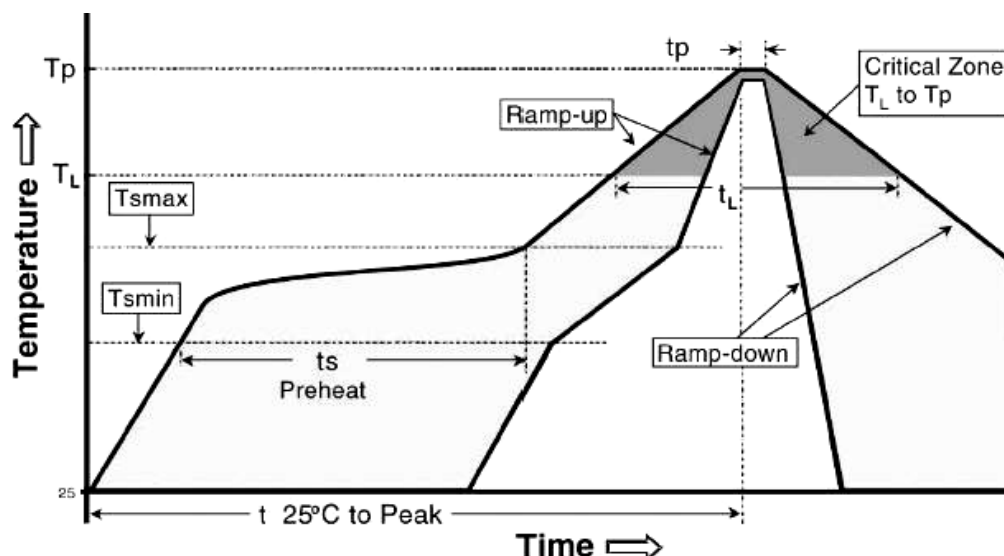

Profile Feature	Lead (Pb)-Free Assembly
Average ramp-up rate (Tsmax to Tp)	3°C / second max.
Preheat - Temperature Min (Tsmin) - Temperature Max (Tsmax) - Time (Tsmin to Tsmax) (ts)	150°C 200°C 60 -120 seconds
Time maintained above : - Temperature (Tl) - Time (tL)	217°C 60-150 seconds
Peak Temperature (Tp)	260°C
Time within $\begin{matrix} +0 \\ -5 \end{matrix}$ °C of actual Peak Temperature (tp) ²	10 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8minutes max.

Allowed Re-flow times : 3 times

Remark : To avoid discoloration phenomena of chip on terminal electrodes,
please use N2 Re-flow furnace.



**Totally Lead free Chip Resistors
(RM series standard)
Halogen-Free**

Document No.	TRM-XX0S020B
Revise Date	2024 / 08 / 09
Page number	13/13

11. Storage Conditions :

Temperature: 5°C~35°C ,Humidity:40%~75%

12. Shelf Life :

2 years from manufacturing date.

13. ECN :

Engineering Change Notice: The customer will be informed with ECN if there is significant modification on the characteristics and materials described in Approval Sheet.

14. Manufacturing Country & City :

TA-I TECHNOLOGY CO., LTD. (Taiwan– Tao Yuan)

Tel: 886-3-3246169 Fax : 886-3-3246167

Associated companies :

(1) TA-I TECHNOLOGY (SU ZHOU) CO., LTD. (China – Su Zhou)

Tel :(+86) 512-63457879 Fax : (+86) 512-63457869

(2) TA-I TECHNOLOGY ELECTRONIC (DONGGUAN) CO., LTD. (China –Dongguan)

Tel : (+86) 769-8339-4790~3 Fax : (+86) 769-8339-4794

(3) FORTUNE TASK ENTERPRISES LIMITED.(China – Dongguan)

Tel : (+86) 769-8339-4790~3 Fax : (+86) 769-8339-4794

(4) TAI OHM ELECTRONICS (M) SDN. BHD. (Malaysia – Penang)

Tel :(+60) 4- 3900480 Fax : (+60) 4-390148